



NICOBAND SELF-ADHESIVE SEALANT TAPE

SIMPLE SOLUTION FOR COMPLICATED ISSUES
OR DIY REPAIR AND SEALING

KNOWLEDGE. EXPERIENCE. CRAFTSMANSHIP.

WWW.TECHNONICOL.IN

SIMPLE SOLUTION FOR COMPLICATED ISSUES OR DIY REPAIR AND SEALING


Everyone has experienced such misfortunes as leakage of flat and pitched roofs, haven't they? Even insignificant leakages lead to soaking of the thermal insulation and following destruction of the roofing constructions, let alone the appearance of stains on ceilings and walls and disturbance of temperature and humidity conditions in the premises. Self-adhesive sealant tape NICOBAND can solve this problem.



Universal self-adhesive sealant tape NICOBAND consists of a 1.5 mm polymer-bitumen waterproofing layer with a colored aluminum coating, which protects the material from the impacts of UV radiation, adds rigidity and contributes to tough adhesion of sealed elements. The bottom side of the material is covered with an easy-removable protective film.

SIZES AVAILABLE:

| Width, cm | 5 | 7.5 | 10 | 15 | 20 | 30 |
|--------------|---|-----|----|----|----|----|
| Length, 3 m | + | + | + | + | | |
| Length, 10 m | | + | + | + | + | + |

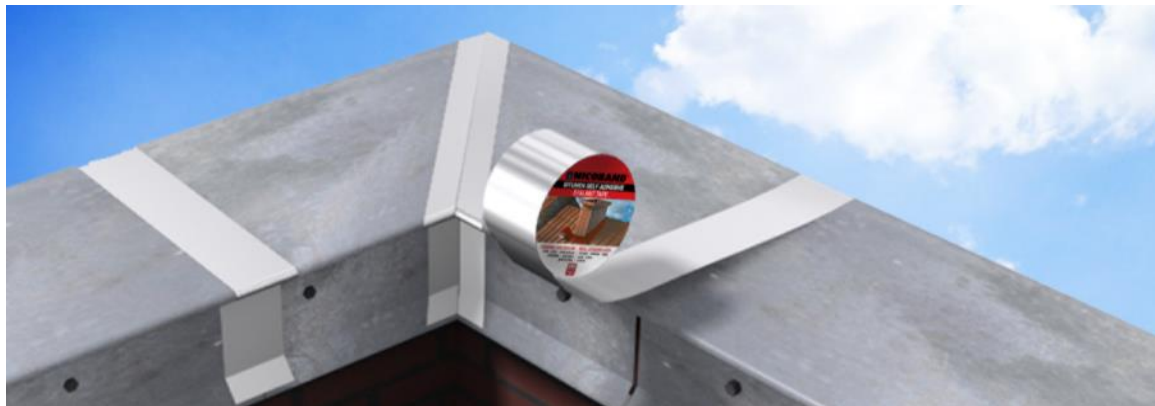

DESCRIPTION:

NICOBAND is a convenient way to seal various cracks and joints. It can also be used to insulate junctions, for roofing repairs and for roof repair systems. The special UV protection layer increases its service life outdoors and the assortment of colors makes it suitable for any roof.

PURPOSE:

Bonds and seams sealing, repair of cracks on roofs of:

- Metal, natural or bitumen roofing shingles
- Bitumen membranes, seam roofing

Junction sealing:

- Mansard windows and canopy
- Pipes and antennas, greenhouses, balconies

Drain system repair:

- Gutters, pipes
- Plastic and metal elements

ADVANTAGES:



Protected from UV radiation

The bitumen layer of NICOBAND sealant tape is protected from UV radiation by aluminum coating. This makes it possible to use the tape outdoor.



Flawless adhesion to many different surfaces

The self-adhesive layer provides perfect quality adhesion to many different surfaces: metal, slate, wood, plastic, concrete, glass, etc.



Different colors

The tape is designed for the most popular roofing colors (including metallic). It allows performing repairs or maintenance in the tone of the main surface without disturbing its form.



NECESSARY TOOLS:

To apply NICOBAND, one only needs the tools, which can be found in any house – measuring tape, marker, knife and roller or any other substitution, gloves and a piece of cloth.



SURFACE PREPARATION:

- Clean and degrease the surface of application before attaching the material. Temperature of the surface and the material should not be less than +5 °C
- It is not recommended to apply NICOBAND on hot vertical surfaces or on surfaces with a temperature above +80 °C
- Do not apply the tape on wet surfaces. The surface must be dry and clean, otherwise strong adhesion of NICOBAND to the surface cannot be guaranteed



METHOD OF APPLICATION:



Measure and cut the material. For more reliable sealing the tape should overlap the hole for 3-5 cm from each side depending on the rate of damage.



Remove the protective film.



Attach NICOBAND to the surface and press it.



If necessary, check the reliability of adhesion.

ROOFING DAMAGE REPAIR:



Self-adhesive sealant tape NICOBAND is suitable for repair of any roof from natural or metal shingles, bitumen shingles, bitumen or seam roofing.



To provide diverse application, the tape is designed in different colors, which allows to easily find the matching color of self-adhesive sealant tape.



For better adhesion to the surface, press the band with a roller or hand over the entire surface.



Self-adhesive sealant tape NICOBAND perfectly adheres to different surfaces, providing reliable and long-lasting sealing.

INSTALLATION ON CYLINDRICAL SURFACES:



To repair the damage on pipes, the tape is wound spirally (with an overlap on the previous turn).



Self-adhesive sealant tape NICOBAND gives an opportunity to feel professional in construction and repair.



This material solves current issues quick and simply. **Minimal efforts - maximal efficiency and reliability!**

THANK YOU FOR ATTENTION!

TECHNONICOL India Private Limited

+91 22 2872 8691

+91 11 4372 1455

info@technonicol.in

WWW.TECHNONICOL.IN